



# DECORIA CONTACTACK

adore®



Natural Plank | 8107

Barnwood Plank | 8104

Blonde Plank | 8108

Gray Scrape Plank | 8103

Maple Sugar Plank | 8101


Burnt Tile | 8121

Pewter Tile | 8122

SIMPLEST PRESS + PLACE INSTALLATION  
 IMMEDIATE USE - MINIMAL DOWNTIME  
 COMPATIBLE WITH MOST EXISTING FLOORS  
 COMMERCIAL GRADE PERFORMANCE,  
 EVEN UNDER HEAVY ROLLING LOADS  
 PREVENTS TOPICAL LIQUID MIGRATION  
 COMFORTABLE NOISE ATTENUATION  
 FLOORSCORE® CERTIFIED

10 YEAR LIMITED COMMERCIAL WARRANTY  
 25 YEAR LIMITED RESIDENTIAL WARRANTY

SUITABLE FOR, BUT NOT LIMITED TO:  
 COMMERCIAL, RETAIL, EDUCATION,  
 HEALTHCARE, HOUSING + RESIDENCES,  
 INSTITUTIONAL + CORPORATE OFFICES

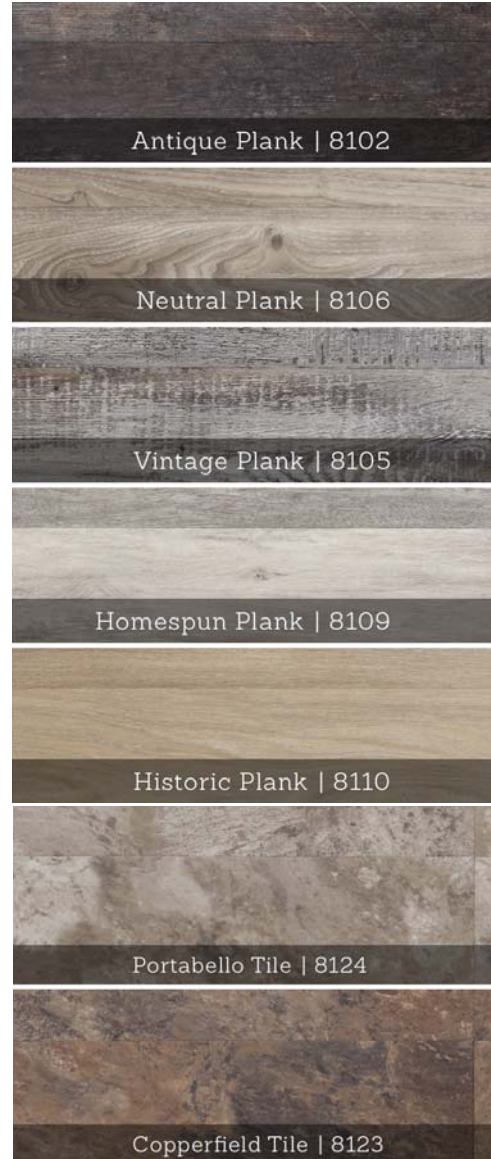

Antique Plank | 8102

Neutral Plank | 8106

Vintage Plank | 8105

Homespun Plank | 8109

Historic Plank | 8110

Portabello Tile | 8124


Copperfield Tile | 8123

## PLANK SPECIFICATIONS

|               |                                  |
|---------------|----------------------------------|
| SIZE          | 7.25" X 48"                      |
|               | 18.4 X 122 CM                    |
| THICKNESS     | 0.16" / 4.0MM                    |
| WEAR LAYER    | 22MIL / 0.55MM                   |
| CONTENTS      | 10 PLANKS, 24.17 FT <sup>2</sup> |
| WEIGHT/CARTON | 37.5 LBS.                        |

## TILE SPECIFICATIONS

|               |                             |
|---------------|-----------------------------|
| SIZE          | 18" X 18"                   |
|               | 45.72 X 45.72 CM            |
| THICKNESS     | 0.16" X 4.0MM               |
| WEAR LAYER    | 22MIL / 0.55MM              |
| CONTENTS      | 8 TILES, 18 FT <sup>2</sup> |
| WEIGHT/CARTON | 18 LBS.                     |

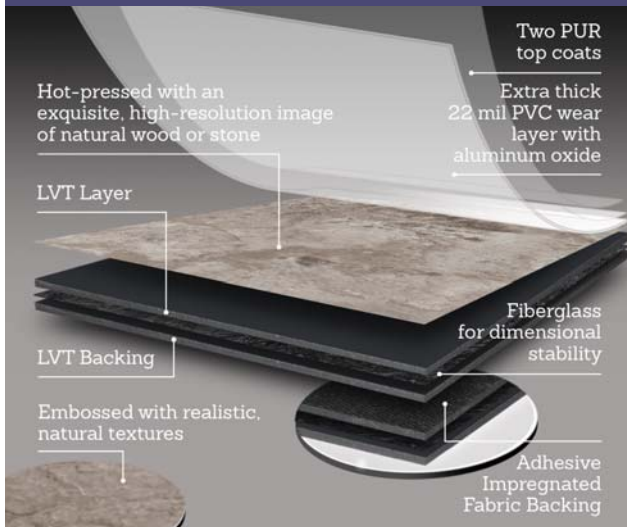

## PHYSICAL PROPERTIES

|                           |                       |               |
|---------------------------|-----------------------|---------------|
| ASTM D-2047               | Slip Resistance       | ≥ 0.6         |
| ASTM E-648                | Critical Radiant Flux | Class 1       |
| ASTM F-386                | Thickness             | Meets/Exceeds |
| ASTM F-410                | Wear Layer Gauge      | Meets/Exceeds |
| ASTM F-137                | Flexibility           | Meets/Exceeds |
| ASTM F-925                | Chemical Resistance   | Meets/Exceeds |
| ASTM F-970                | Static Load Limit     | Meets/Exceeds |
| ASTM F-1514               | Heat Stability        | Meets/Exceeds |
| ASTM F-1515               | Light Stability       | Meets/Exceeds |
| ASTM F-1914               | Indentation           | Meets/Exceeds |
| ASTM F-2055               | Size + Squareness     | Meets/Exceeds |
| ASTM F-2199/<br>ISO 23999 | Curling               | Meets/Exceeds |
| ASTM F-2199/<br>ISO-23999 | Dimensional Stability | Meets/Exceeds |

adore®